


π

PERANCEA

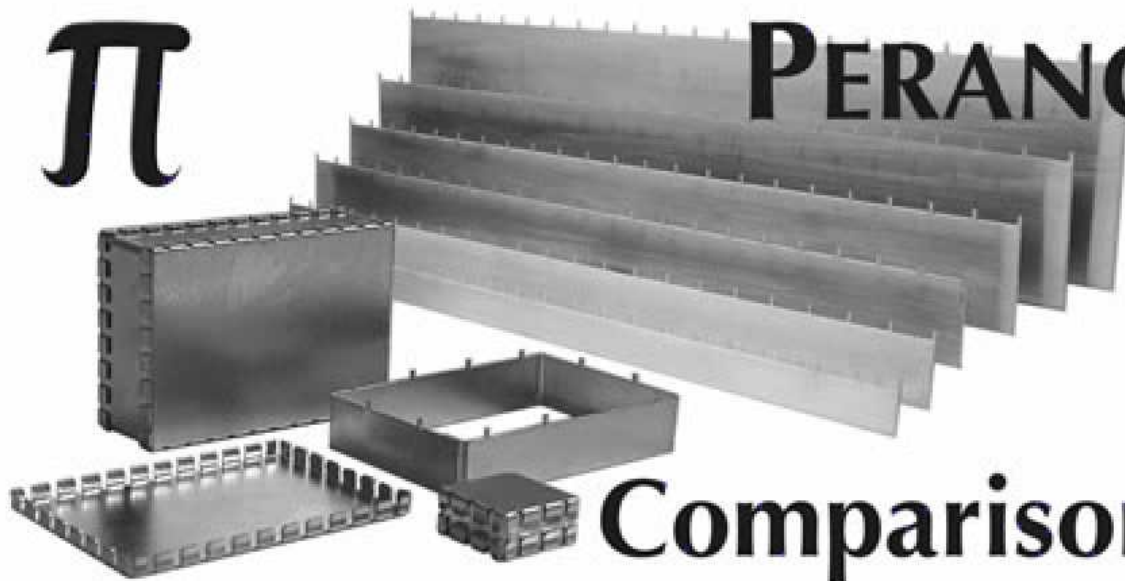

A Comparison of Materials for Screening

Perancea has extensive experience and expertise in RFI/EMI screening, particularly at board level, providing a whole gamut of solutions to control EMC.

Screening performance is dependent on other factors as well as the choice of enclosure and thus the level of screening can only be ascertained by testing the final product. However, the following provides an indication of the attenuation efficiency rating over a range of materials:

| Material | Attenuation | Surface Resistivity (Ω /sq) | Conductivity (Mho) | Cost Ratio |
|-----------------------|-------------|-------------------------------------|--------------------|------------|
| Steel | Best | 20×10^{-6} | 5×10^4 | 1 |
| Bright Acid Tin Steel | As Above | Lower than above | Higher than above | 3 |
| Nickel | 2nd | 11.8×10^{-6} | 8.5×10^4 | 20 |
| Copper | 3rd | 1.78×10^{-6} | 5.6×10^5 | 8 |
| Brass | 4th | 9×10^{-6} | 1.11×10^5 | 8 |
| Aluminium | 5th | 3.21×10^{-6} | 3.1×10^5 | 2 |

The above figures are provided only as a guide and should not be taken as binding upon the manufacturer

- 1: No detailed figures for attenuation are available
- 2: Surface resistivity - the lower the figure, the better the conductivity
- 3: Conductivity - the higher the figure, the better the conductor

If you need screened enclosure solutions to protect your applications against RFI and EMI, call Perancea now and see what we can do for you.

CA Electro Components Ltd.

36 Park Lane, Bishops Stortford,
Hertfordshire. CM23 3NH. United Kingdom.

Telephone and Fax: (44) 01279 656051

In line with our policy of continuous improvement, we reserve the right to make design or product alterations without prior notice.